



TK-V400S

4-Port Video Splitter

TRENDnet's TK-V400 4-port Video Splitter broadcasts your computer's video signal to 4 VGA monitors up to 2048 x 1536 resolutions, providing an efficient solution for conducting presentations, remote monitoring, and multimedia applications.

Features

- Broadcasts real-time video to multiple display locations
- Display entertainment, lecture, news, and advertisement simultaneously on four different monitors
- Supports ultra high 350 MHz video (-3dB) bandwidth
- Superior VGA quality – up to 2048 x 1536 at 60Hz
- Extends video signal up to 65 meters (210 feet) without degradation
- Alert high or low level brightness control
- Supports VGA, SVGA, XGA and Multi-Synchronization monitors
- Utilizes standard monitor extension cables
- Provides locking connectors for cables
- Hassle free – No software required
- Metal casing
- 2-Year warranty

Specifications


Hardware	
Port Interface	1 x HDDB 15 pin Male 4 x HDDB 15 pin Female
Signal Types	VGA, SVGA, XGA and Multi Synchronization
Supported OS	Windows 98SE/ME/2000/XP, Mac 9.0 or higher
Resolution	2048 x 1536 @ 60MHz
LEDs	Power
Housing	Metal
Power Adapter	9VDC 600mA
Power Consumption	1.62W (Max)
Dimensions	121(L) x 72(W) x 43(H) mm (4.76 x 2.83 x 1.69 in.)
Weight	437 g (15.4 Oz)
Temperature	Operating: 0° C ~ 40° C (32° F ~ 104° F) Storage: -5° C ~ 70° C (23° F ~ 158° F)
Humidity	0 ~ 80% (Non-condensing)
Certifications	CE, FCC



Front View



Rear View

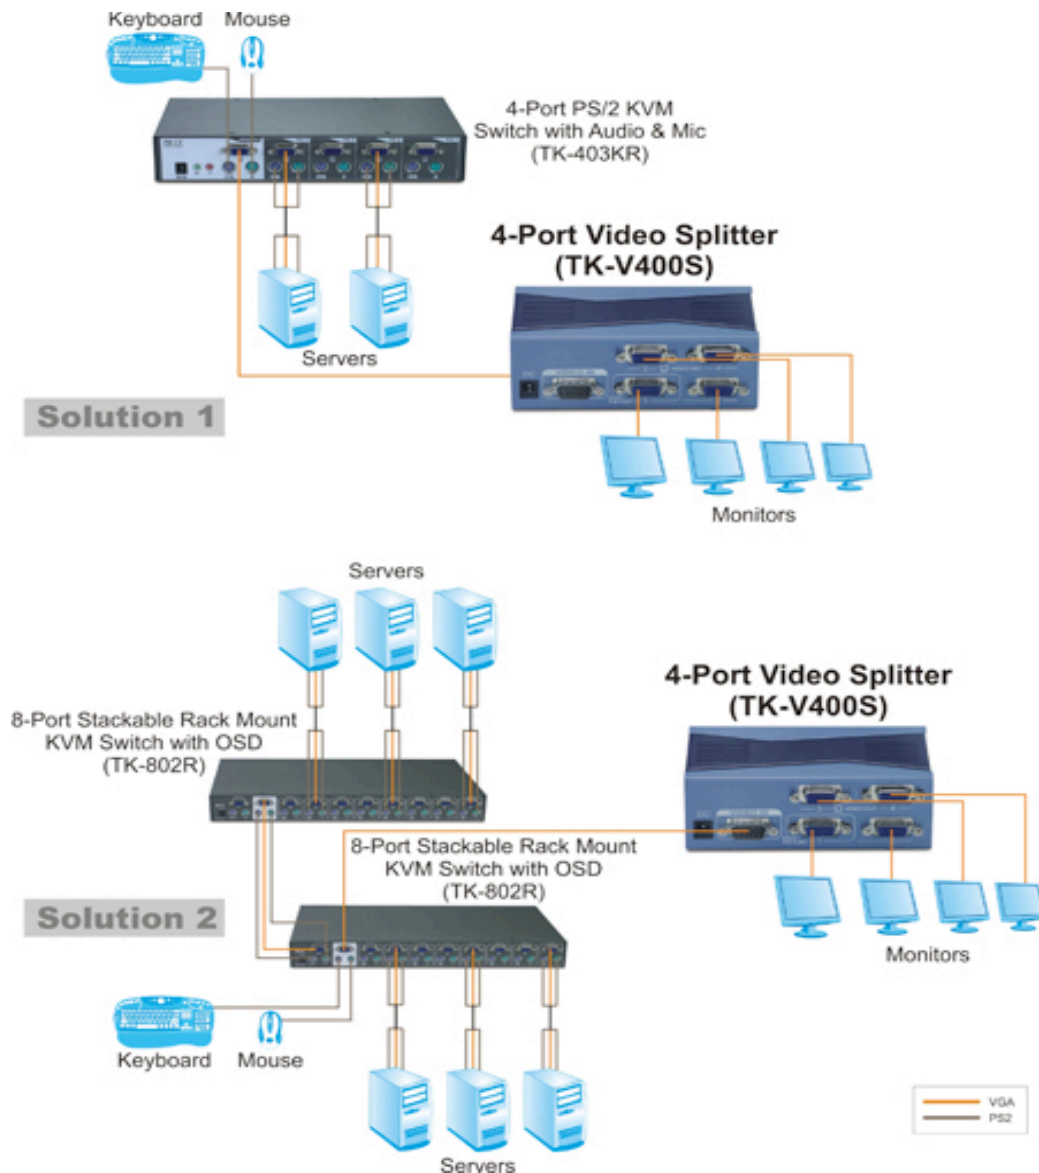

Video Splitter Solutions

Package Contents

- TK-V400S
- Multiple-Language User's Guide
- Super Thin M/F VGA Cable
- 9VDC 600mA Power Adapter

Related Products

- TK-401R
- TK-801R
- TK-802R
- TK-1602R

TRENDnetDirect is a trading division of IP Comms Ltd
 Signal House, Crown Way, Crown Park, Rushden, Northamptonshire, NN10 6BS,
 Company Registration Number: 04838367

Sales Tel: 0845 618 2885 Technical Support: Tel: 0845 618 2887